

A New Mean-Square Stabilization Criterion for Networked Systems with Network Induced Time Delay and Packet Dropout

H. Yao, F. Yuan

School of Mathematics and Statistics
Anyang Normal University, Anyang, Henan, 455002, China
(yaohejun@126.com)

Abstract

The problem of delay-distribution-dependent mean-square stability for networked control systems with stochastic network induced delay and data packet dropout is concerned in this paper. By viewing the stochastic delay and data packet dropout as stochastic time-varying delay, which is assumed to be satisfying a interval Bernoulli distribution, a new approach is given to model the networked control systems. Based on the linear matrix inequality approach, a new stabilization criterion is obtained to design the feedback controller which makes the closed-loop systems mean-square stable. A numerical example is provided to demonstrate the validity of the proposed design approach.

Key words :

Networked control systems; stochastic delay; mean-square stable

1. Introduction

It is well known that a feedback control system in which all devices(sensors, controllers and actuators) are interconnected by communication networks is called networked control systems(NCSs).Compared with the traditional point-to-point architecture control systems, the networked control systems have the advantages of high mobility, low cost, easy maintenance and reconfiguration. For these advantages, the networked control systems receive more and more attention and had been a very hot research topic^[1-6].

However, the network itself is a dynamic system that exhibits characteristics such as network-induced delay and packet losses. The insertion of the communication network induces different forms of time delay uncertainty between sensors, actuators and controllers. These time delays

come from the time sharing of the communication medium as well as the computation time required for physical signal coding and communication processing^[7-12]. It is well known in control systems that time delays can degrade a system's performance and even cause system instability. Another significant difference between NCSs and standard digital control is the possibility that data may be lost while in transit through the network because of uncertainty and noise. And the worked-induced delay or packet losses are usually stochastic and described by a two-state Markov chain, which is especially common in wireless communication networks such as Bluetooth and WLAN. Different methods have been developed to deal with the above problems^[13-15]. The stochastic optimal control of networked control systems whose network-induced delay is shorter than one sampling period is studied using the time-stamp technique^[14]. By viewing the time-varying network-induced delay as parameter uncertainty, the stabilization of networked control systems with delay shorter than one sampling period is studied and sufficient conditions expressed in linear matrix inequality are presented in [15].

In this paper, our objective is to consider the problem of delay-distribution-dependent stability for networked control systems with stochastic delay and data packet dropout. A new approach is given to model the NCSs. Based on the Lyapunov stability theorem a new stabilization criterion is given.

2. Problem Formulation

Consider the following control system

$$\begin{aligned} \dot{x}(t) &= Ax(t) + Bu(t) \\ y(t) &= Cx(t) + Du(t) \\ x(t_0) &= x_0 \end{aligned} \tag{1}$$

Where $x(t) \in R^n$ is the state vector, $u(t) \in R^m$ is the input vector, $y(t) \in R^r$ is the controlled output, x_0 is an constant vector. A, B, C and D are known real constant matrices with appropriate dimensions.

Throughout this note, we suppose that all the system's states are available for a state feedback control. In the presence of the control network, which is shown in fig.1, data transfers between the controller and the remote system, e.g., sensors and actuators in a distributed control system will induce network delay in addition to the controller proceeding delay.

In this note we make the following assumptions:

Assumption 1: Sensor and controller are clock-driven;

Assumption 2: Actuator is event-driven.

In fig.1, τ^{sc} is the communication delay between the sensor and the controller; τ^c is the computational delay in the controller; τ^{ca} is the communication delay between the controller and the actuator. Here we suppose that $\tau_k = \tau^{sc} + \tau^c + \tau^{ca} \in [0, \bar{\tau}]$ is stochastic network-induced delay, where $\bar{\tau}$ is a constant. $d(k) \in [0, \bar{d}]$ is the stochastic data dropout number between the sensor and the actuator.

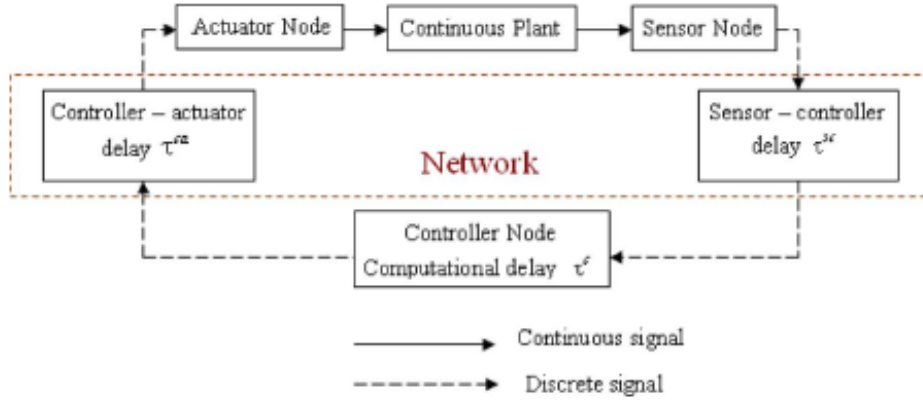


Fig.1 A typical networked control system

We introduce the stochastic delay $h(t)$ to denote the stochastic delay and data packet dropout, where $h(t) = t - t_k + d(k)T + \tau_k$. where $h(t) \in [0, \tau_2]$, $\tau_2 = (1 + \bar{d})T + \bar{\tau}$.

With the state feedback controller

$$u(t) = Kx(t) \quad (2)$$

where $K \in R^{m \times n}$ is a constant matrix to be obtained.

We know that

$$u(t) = K\bar{x}(t_k) = Kx(t_k - d(k)T - \tau_k) = Kx(t - h(t))$$

Inserting the above controller into systems (1), we obtain the closed system:

$$\begin{aligned} \dot{x}(t) &= Ax(t) + BKx(t - h(t)) \\ y(t) &= Cx(t) + Du(t) \quad t \in [t_k, t_{k+1}] \quad k = 1, 2, \dots \\ x(t) &= \phi(t) \quad t \in [t_0 - \tau_2, t_0] \end{aligned} \quad (3)$$

Where $h(t)$ is stochastic on $[0, \tau_2]$ without any constraint on its derivative. The initial condition of the state $x(t)$ on $t \in [t_0 - \tau_2, t_0]$ is supplemented as $x(t) = \phi(t)$, $t \in [t_0 - \tau_2, t_0]$, $\phi(t_0) = x_0$, where $\phi(t)$ is a continuous function on $[t_0 - \tau_2, t_0]$.

It is assumed that there exists a constant $\tau_1 \in [0, \tau_2)$ such that the probability of $h(t)$ taking values in $[0, \tau_1)$ and $[\tau_1, \tau_2]$ can be observed. In order to employ the information of the probability distribution of the delay in the system model, the following sets are proposed firstly

$$\Omega_1 = \{t: h(t) \in [0, \tau_1)\} \quad \Omega_2 = \{t: h(t) \in [\tau_1, \tau_2]\}$$

Obviously, $\Omega_1 \cup \Omega_2 = R^+$ and $\Omega_1 \cap \Omega_2 = \Phi$.

Then we define two functions as:

$$h_1(t) = \begin{cases} h(t) & t \in \Omega_1 \\ 0 & t \notin \Omega_1 \end{cases} \quad h_2(t) = \begin{cases} h(t) & t \in \Omega_2 \\ \tau_1 & t \notin \Omega_2 \end{cases}$$

Corresponding to $h(t)$ taking values in different intervals, a stochastic variable $\beta(t)$ is defined

$$\beta(t) = \begin{cases} 1 & t \in \Omega_1 \\ 0 & t \in \Omega_2 \end{cases}$$

Where we suppose that $\beta(t)$ is a Bernoulli distributed sequence with

$$\Pr ob\{\beta(t) = 1\} = E\{\beta(t)\} = \beta$$

where $\beta \in [0, 1]$ is a constant.

By using the new functions $h_1(t), h_2(t)$ and stochastic variable $\beta(t)$, the systems (3) can be equivalently written as

$$\begin{aligned} \dot{x}(t) &= Ax(t) + \beta(t)BKx(t - h_1(t)) + (1 - \beta(t))BKx(t - h_2(t)) \\ y(t) &= Cx(t) + Du(t) \quad t \in [t_k, t_{k+1}] \quad k = 1, 2, L \\ x(t) &= \phi(t) \quad t \in [t_0 - \tau_2, t_0] \end{aligned} \quad (4)$$

3. Main Results

Lemma 1^[2] For any vectors a, b and matrices N, X, Y, Z with appropriate dimensions, if the following matrix inequality holds

$$\begin{bmatrix} X & Y \\ Y^T & Z \end{bmatrix} \geq 0$$

then we have

$$-2a^T N b \leq \inf_{X, Y, Z} \begin{bmatrix} a \\ b \end{bmatrix}^T \begin{bmatrix} X & Y - N \\ Y^T - N^T & Z \end{bmatrix} \begin{bmatrix} a \\ b \end{bmatrix}$$

Lemma 2^[6] The LMI $\begin{bmatrix} Y(x) & W(x) \\ * & R(x) \end{bmatrix} > 0$ is equivalent to

$$R(x) > 0, Y(x) - W(x)R^{-1}(x)W^T(x) > 0$$

where $Y(x) = Y^T(x), R(x) = R^T(x)$ depend on x .

Theorem1. For the networked control systems (4), if there exist positive-definite matrices $P, Q_1, Q_2 \in R^{n \times n}$, matrices $K \in R^{m \times n}$, $X_i, Y_i, i = 1, 2$ with appropriate dimensions, such that the following matrix inequalities hold

$$\Theta = \begin{bmatrix} \Theta_{11} & \Theta_{12} & \Theta_{13} \\ * & \Theta_{22} & \Theta_{23} \\ * & * & \Theta_{33} \end{bmatrix} < 0 \quad (5)$$

$$\begin{bmatrix} X_1 & Y_1 \\ * & Q_1 \end{bmatrix} \geq 0 \quad (6)$$

$$\begin{bmatrix} X_2 & Y_2 \\ * & Q_2 \end{bmatrix} \geq 0 \quad (7)$$

where

$$\begin{aligned} \Theta_{11} &= PA + A^T P + \tau_1 A^T Q_1 A + \tau_1 X_{111} + \tau_2 A^T Q_2 A + \tau_2 X_{211} + Y_{11} + Y_{11}^T + Y_{21} + Y_{21}^T \\ \Theta_{12} &= P\beta BK + \tau_1 A^T Q_1 \beta BK + \tau_1 X_{112} + \tau_2 \beta A^T Q_2 BK + \tau_2 X_{212} - Y_{11} + Y_{12}^T + Y_{22}^T \\ \Theta_{13} &= (1 - \beta)PBK + \tau_1(1 - \beta)A^T Q_1 BK + \tau_1 X_{113} + \tau_2(1 - \beta)A^T Q_2 BK + \tau_2 X_{213} - Y_{21} + Y_{13}^T + Y_{23}^T \\ \Theta_{22} &= \tau_1 K^T B^T Q_1 \beta BK + \tau_1 X_{122} + \tau_2 \beta K^T B^T Q_2 BK + \tau_2 X_{222} - Y_{12} - Y_{12}^T \\ \Theta_{23} &= \tau_1 X_{123} + \tau_2 X_{223} \\ \Theta_{33} &= \tau_1(1 - \beta)K^T B^T Q_1 BK + \tau_1 X_{133} + \tau_2(1 - \beta)K^T B^T Q_2 BK + \tau_2 X_{233} - Y_{23} - Y_{23}^T \end{aligned}$$

With the controller (2), the network control systems (4) is mean-square stable.

Proof Choose a Lyapunov functional candidate for the systems (4) as follows

$$V(t) = V_1(t) + V_2(t) + V_3(t) \quad (8)$$

where

$$\begin{aligned} V_1(t) &= x^T(t)Px(t) \\ V_2(t) &= \int_{-\tau_1}^0 \int_{t+\theta}^t \xi^T(s)Q_1\xi(s)dsd\theta \\ V_3(t) &= \int_{-\tau_2}^0 \int_{t+\theta}^t \xi^T(s)Q_2\xi(s)dsd\theta \end{aligned}$$

where P, Q_1, Q_2 positive-definite matrices with appropriate dimensions.

Then, along the solution of systems (4) we have

$$\dot{V}_1(t) = 2x^T(t)P\bar{A}\xi(t) \quad (9)$$

where

$$\begin{aligned} \xi(t) &= [x^T(t) \quad x^T(t - h_1(t)) \quad x^T(t - h_2(t))] \\ \bar{A} &= [A \quad \beta(t)BK \quad (1 - \beta(t))BK] \end{aligned}$$

$$V_2(t) = \tau_1 \xi^T(t) \bar{A}^T Q_1 \bar{A} \xi(t) - \int_{t-\tau_1}^t \mathfrak{X}(s) Q_1 \mathfrak{X}(s) ds \quad (10)$$

and

$$V_3(t) = \tau_2 \xi^T(t) \bar{A}^T Q_2 \bar{A} \xi(t) - \int_{t-\tau_2}^t \mathfrak{X}(s) Q_2 \mathfrak{X}(s) ds \quad (11)$$

We know

$$x(t) - x(t - h_1(t)) - \int_{t-h_1(t)}^t \mathfrak{X}(s) ds = 0$$

$$x(t) - x(t - h_2(t)) - \int_{t-h_2(t)}^t \mathfrak{X}(s) ds = 0$$

With two $4n \times n$ matrices

$$N = \begin{bmatrix} N_1 \\ N_2 \\ N_3 \end{bmatrix}, M = \begin{bmatrix} M_1 \\ M_2 \\ M_3 \end{bmatrix}$$

We know

$$0 = \xi^T(t) N [x(t) - x(t - h_1(t)) - \int_{t-h_1(t)}^t \mathfrak{X}(s) ds]$$

$$0 = \xi^T(t) M [x(t) - x(t - h_2(t)) - \int_{t-h_2(t)}^t \mathfrak{X}(s) ds]$$

By the lemma 1, we obtain

$$\begin{aligned} 0 &\leq 2\xi^T(t) N [x(t) - x(t - h_1(t))] + \int_{t-h_1(t)}^t \begin{bmatrix} \xi(t) \\ \mathfrak{X}(s) \end{bmatrix}^T \begin{bmatrix} X_1 & Y_1 - N \\ * & Q_1 \end{bmatrix} \begin{bmatrix} \xi(t) \\ \mathfrak{X}(s) \end{bmatrix} ds \\ &= 2\xi^T(t) Y_1 [x(t) - x(t - h_1(t))] + h_1(t) \xi^T(t) X_1 \xi(t) + \int_{t-h_1(t)}^t \mathfrak{X}(s) Q_1 \mathfrak{X}(s) ds \\ &\leq 2\xi^T(t) Y_1 [x(t) - x(t - h_1(t))] + \tau_1 \xi^T(t) X_1 \xi(t) + \int_{t-\tau_1}^t \mathfrak{X}(s) Q_1 \mathfrak{X}(s) ds \end{aligned} \quad (12)$$

and

$$0 \leq 2\xi^T(t) Y_2 [x(t) - x(t - h_2(t))] + \tau_2 \xi^T(t) X_2 \xi(t) + \int_{t-\tau_2}^t \mathfrak{X}(s) Q_2 \mathfrak{X}(s) ds \quad (13)$$

where

$$X_i = \begin{bmatrix} X_{i11} & X_{i12} & X_{i13} \\ * & X_{i22} & X_{i23} \\ * & * & X_{i33} \end{bmatrix}, Y_i = \begin{bmatrix} Y_{i1} \\ Y_{i2} \\ Y_{i3} \end{bmatrix} \quad i = 1, 2$$

With the (9-13), we can obtain

$$\begin{aligned} E\{V(t)\} &= E\{2x^T(t) P \bar{A} \xi(t) + \tau_1 \xi^T(t) \bar{A}^T Q_1 \bar{A} \xi(t) + 2\xi^T(t) Y_1 [x(t) - x(t - h_1(t))] \\ &\quad + \tau_1 \xi^T(t) X_1 \xi(t) + \tau_2 \xi^T(t) \bar{A}^T Q_2 \bar{A} \xi(t) + 2\xi^T(t) Y_2 [x(t) - x(t - h_2(t))] \\ &\quad + \tau_2 \xi^T(t) X_2 \xi(t)\} \\ &= \xi^T(t) \Theta \xi(t) \end{aligned}$$

With the Lyapunov stability theorem and the inequality (5), we know that the system (4) is mean-square stable.

Theorem2. For the networked control systems (4), if there exist positive-definite matrices $\bar{P}, \bar{Q}_1, \bar{Q}_2 \in R^{n \times n}$, matrices $\bar{K} \in R^{m \times n}$, $\bar{X}_i, \bar{Y}_i, i = 1, 2$ with appropriate dimensions, such that the following linear matrix inequalities hold

$$\begin{bmatrix} \Xi_{11} & \Xi_{12} & \Xi_{13} & \tau_1 \beta \bar{P} A^T & \tau_1 (1-\beta) \bar{P} A^T & \tau_2 \beta \bar{P} A^T & \tau_2 (1-\beta) \bar{P} A^T \\ * & \Xi_{22} & \Xi_{23} & \tau_1 \beta \bar{K}^T B^T & 0 & \tau_2 \beta \bar{K}^T B^T & 0 \\ * & * & \Xi_{33} & 0 & \tau_1 (1-\beta) \bar{K}^T B^T & 0 & \tau_2 (1-\beta) \bar{K}^T B^T \\ * & * & * & -\tau_1 \beta \bar{Q}_1 & 0 & 0 & 0 \\ * & * & * & * & -\tau_1 (1-\beta) \bar{Q}_1 & 0 & 0 \\ * & * & * & * & * & -\tau_2 \beta \bar{Q}_2 & 0 \\ * & * & * & * & * & * & -\tau_2 (1-\beta) \bar{Q}_2 \end{bmatrix} < 0 \quad (14)$$

$$\begin{bmatrix} X_1 & Y_1 \\ * & Q_1 \end{bmatrix} \geq 0 \quad (15)$$

$$\begin{bmatrix} X_2 & Y_2 \\ * & Q_2 \end{bmatrix} \geq 0 \quad (16)$$

where

$$\begin{aligned} \Xi_{11} &= -A\bar{P} + \bar{P}A^T + \tau_1 A^T Q_1 A + \tau_1 \bar{X}_{111} + \tau_2 \bar{X}_{211} + \bar{Y}_{11} + \bar{Y}_{11}^T + \bar{Y}_{21} + \bar{Y}_{21}^T \\ \Xi_{12} &= \beta B \bar{K} + \tau_1 \bar{X}_{112} + \tau_2 \bar{X}_{212} - \bar{Y}_{11} + \bar{Y}_{12}^T + \bar{Y}_{22}^T \\ \Xi_{13} &= (1-\beta) B \bar{K} + \tau_1 \bar{X}_{113} + \tau_2 \bar{X}_{213} - \bar{Y}_{21} + \bar{Y}_{13}^T + \bar{Y}_{23}^T \\ \Xi_{22} &= \tau_1 \bar{X}_{122} + \tau_2 \bar{X}_{222} - \bar{Y}_{12} - \bar{Y}_{12}^T \\ \Xi_{23} &= \tau_1 \bar{X}_{123} + \tau_2 \bar{X}_{223} \\ \Xi_{33} &= \tau_1 \bar{X}_{133} + \tau_2 \bar{X}_{233} - \bar{Y}_{23} - \bar{Y}_{23}^T \end{aligned}$$

With the controller $u(t) = \bar{K} \bar{P}^{-1} x(t)$, the systems (4) is mean-square stable.

Proof. Now we proof that the inequality(5) is equivalent to the inequality(14). Obviously, by the lemma2, the inequality (5) is equivalent to

$$\begin{aligned} & \Pi + \tau_1 \beta \begin{bmatrix} A^T Q_1 A & A^T Q_1 B K & 0 \\ * & K^T B^T Q_1 B K & 0 \\ * & * & 0 \end{bmatrix} + \tau_1 (1-\beta) \begin{bmatrix} A^T Q_1 A & 0 & A^T Q_1 B K \\ * & 0 & 0 \\ * & * & K^T B^T Q_1 B K \end{bmatrix} \\ & + \tau_2 \beta \begin{bmatrix} A^T Q_2 A & A^T Q_2 B K & 0 \\ * & K^T B^T Q_2 B K & 0 \\ * & * & 0 \end{bmatrix} + \tau_2 (1-\beta) \begin{bmatrix} A^T Q_2 A & 0 & A^T Q_2 B K \\ * & 0 & 0 \\ * & * & K^T B^T Q_2 B K \end{bmatrix} \\ & = \Pi + \alpha \frac{1}{\tau_1 \beta} Q_1^{-1} \alpha^T + \beta \frac{1}{\tau_1 (1-\beta)} Q_1^{-1} \beta^T + \gamma \frac{1}{\tau_2 \beta} Q_2^{-1} \gamma^T + \delta \frac{1}{\tau_2 (1-\beta)} Q_2^{-1} \delta^T < 0 \end{aligned}$$

where

$$\Pi = \begin{bmatrix} \Pi_{11} & \Pi_{12} & \Pi_{13} \\ * & \Pi_{22} & \Pi_{23} \\ * & * & \Pi_{33} \end{bmatrix}$$

$$\begin{aligned} \Pi_{11} &= PA + A^T P + \tau_1 X_{111} + \tau_2 X_{211} + Y_{11} + Y_{11}^T + Y_{21} + Y_{21}^T \\ \Pi_{12} &= \beta BK + \tau_1 X_{112} + \tau_2 X_{212} - Y_{11} + Y_{12}^T + Y_{22}^T \\ \Pi_{13} &= (1-\beta)PB\bar{K} + \tau_1 X_{113} + \tau_2 X_{213} - Y_{21} + Y_{13}^T + Y_{23}^T \\ \Pi_{22} &= \tau_1 X_{122} + \tau_2 X_{222} - Y_{12} - Y_{12}^T \\ \Pi_{23} &= \tau_1 X_{123} + \tau_2 X_{223} \\ \Pi_{33} &= \tau_1 X_{133} + \tau_2 X_{233} - Y_{23} - Y_{23}^T \end{aligned}$$

$$\alpha = \begin{bmatrix} \tau_1 \beta A^T Q_1 \\ \tau_1 \beta K^T B^T Q_1 \\ 0 \end{bmatrix}, \beta = \begin{bmatrix} \tau_1 (1-\beta) A^T Q_1 \\ 0 \\ \tau_1 \beta K^T B^T Q_1 \end{bmatrix}$$

$$\gamma = \begin{bmatrix} \tau_2 \beta A^T Q_2 \\ \tau_2 \beta K^T B^T Q_2 \\ 0 \end{bmatrix}, \delta = \begin{bmatrix} \tau_2 (1-\beta) A^T Q_2 \\ 0 \\ \tau_2 \beta K^T B^T Q_2 \end{bmatrix}$$

By the lemma2, we know that the above inequality is equivalent to

$$\begin{bmatrix} \Omega_{11} & \Omega_{12} & \Omega_{13} & \tau_1 \beta A^T Q_1 & \tau_1 (1-\beta) A^T Q_1 & \tau_2 \beta A^T Q_2 & \tau_2 (1-\beta) A^T Q_2 \\ * & \Omega_{22} & \Omega_{23} & \tau_1 \beta K^T B^T Q_1 & 0 & \tau_2 \beta K^T B^T Q_2 & 0 \\ * & * & \Omega_{33} & 0 & \tau_1 (1-\beta) K^T B^T Q_1 & 0 & \tau_2 (1-\beta) K^T B^T Q_2 \\ * & * & * & -\tau_1 \beta Q_1 & 0 & 0 & 0 \\ * & * & * & * & -\tau_1 (1-\beta) Q_1 & 0 & 0 \\ * & * & * & * & * & -\tau_2 \beta Q_2 & 0 \\ * & * & * & * & * & * & -\tau_2 (1-\beta) Q_2 \end{bmatrix} < 0 \quad (17)$$

where

$$\begin{aligned} \Omega_{11} &= PA + A^T P + \tau_1 X_{111} + \tau_2 X_{211} + Y_{11} + Y_{11}^T + Y_{21} + Y_{21}^T \\ \Omega_{12} &= \beta PBK + \tau_1 X_{112} + \tau_2 X_{212} - Y_{11} + Y_{12}^T + Y_{22}^T \\ \Omega_{13} &= (1-\beta)PBK + \tau_1 X_{113} + \tau_2 X_{213} - Y_{21} + Y_{13}^T + Y_{23}^T \\ \Omega_{22} &= \tau_1 X_{122} + \tau_2 X_{222} - Y_{12} - Y_{12}^T \\ \Omega_{23} &= \tau_1 X_{123} + \tau_2 X_{223} \\ \Omega_{33} &= \tau_1 X_{133} + \tau_2 X_{233} - Y_{23} - Y_{23}^T \end{aligned}$$

Pre- and Post-multiplying the inequality (17) by $\text{diag}\{P^{-1} \ P^{-1} \ P^{-1} \ I \ Q_1^{-1} \ Q_1^{-1} \ Q_2^{-1} \ Q_2^{-1}\}$, and giving some transactions $\bar{P} = P^{-1}$, $\bar{Q}_1 = Q_1^{-1}$, $\bar{Q}_2 = Q_2^{-1}$, $\bar{K} = KP^{-1}$, $\bar{X}_{ijk} = P^{-1} X_{ijk} P^{-1}$, $\bar{Y}_{ij} = P^{-1} Y_{ij} P^{-1}$, $i = 1, 2; j = 1, 2, 3$, we know the inequality (17) is equivalent to (14).

4. Numerical Example



Consider the networked control systems in the form of (4), where

$$A = \begin{bmatrix} 0.2 & 0 \\ 0 & 0.4 \end{bmatrix}, B = \begin{bmatrix} 0 \\ 0.1 \end{bmatrix}, C = \begin{bmatrix} 0.1 & 0 \\ 0 & 0.01 \end{bmatrix}, D = \begin{bmatrix} 0.01 \\ 0 \end{bmatrix}, \beta = 0.4$$

Solving the linear matrix inequalities (14-16), we can obtain the gain matrix K of the stabilizing controller $u(t)$

$$K = [-0.5692 \quad 1.5781]$$

By selecting the initial condition $x(0) = \begin{bmatrix} 1 \\ -1 \end{bmatrix}$, the simulation results are shown in the following figure,

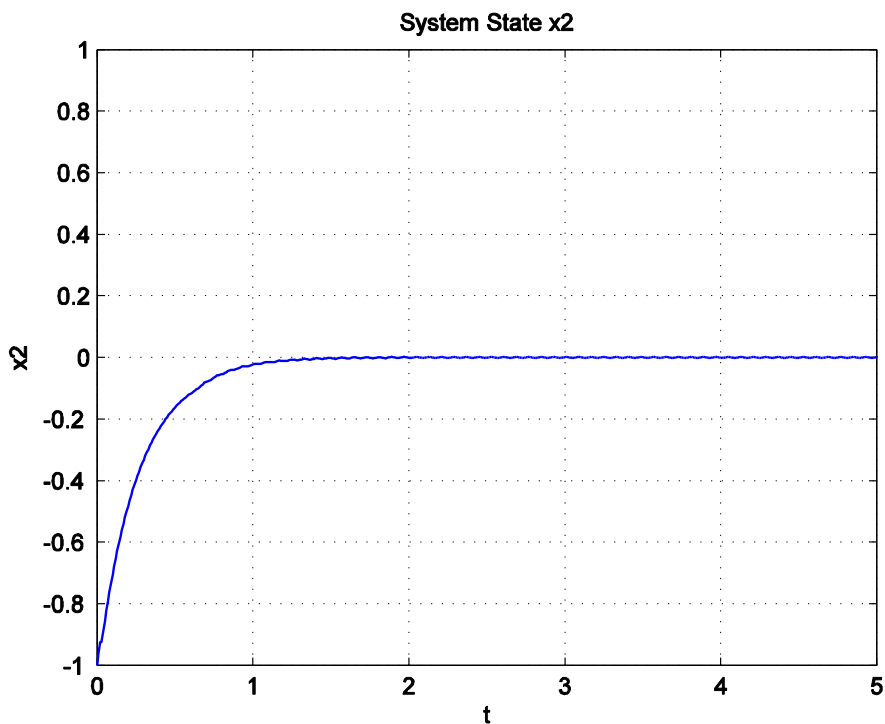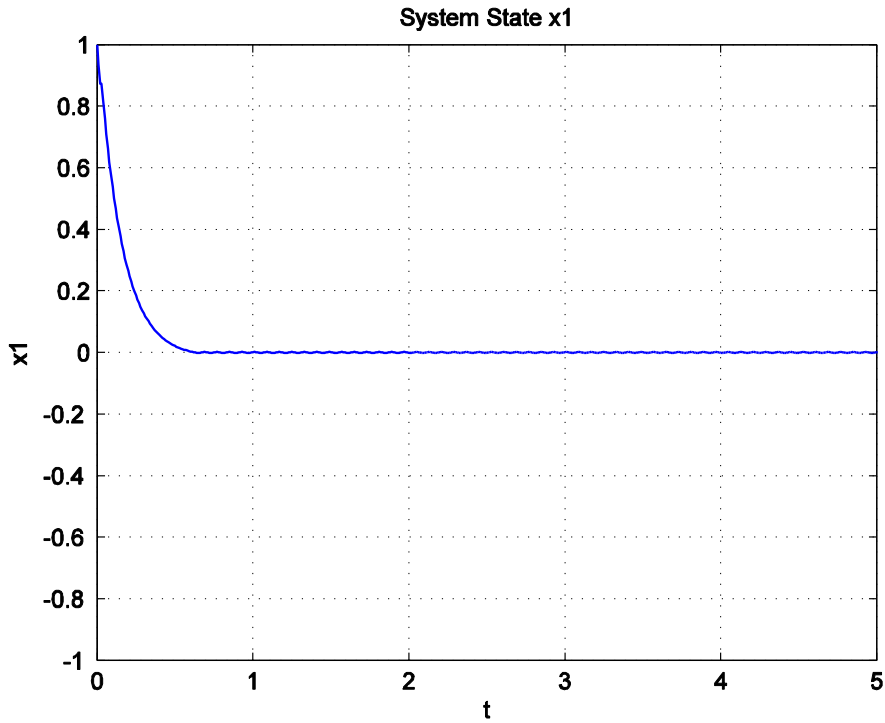

In the above figure, one can see the systems (4) is mean-square stable.

5. Conclusion

In this note, we consider the problem of delay-distribution-dependent mean-square stability for networked control systems with stochastic delay and packet dropout. By giving a new model of networked control systems, a new stabilization criterion is obtained to design the feedback controller.

6. Acknowledgments

The authors would like to thank the associate editor and the anonymous reviewers for their constructive comments and suggestions to improve the quality and the presentation of the paper. This work is supported by National Nature Science Foundation of China under Grant 61073065; Nature Science Foundation of Henan Province under Grant 092300410145; The Education Department of Henan Province Key Foundation under Grant 13A110023.

References

1. T. C. Yang, "Networked control system: a brief survey," IEE Proc., Control Theory Appl., vol. 153, pp. 403-412, 2006.
2. Y. Wang, "H_∞ control of networked control systems with time delay and packet disordering," IET Control Theory Appl., vol.1, pp.1344-1354, 2007.
3. H. Yao, F. Yuan, "Exponential stabilization for a class of nonlinear networked control systems with state delay and networked induced delay", International Journal of Digital Content Technology and its Applications, vol.6, no.5, pp.218-224, 2012.
4. M. Das, R. Ghosh, etc., "Multi-loop Networked process control: a synohronized approach," ISA Transactions, vol.48,pp.122-131,2009.
5. H. Yao, X. Dai, "Mean-square exponential stable control for fuzzy networked systems with stochastic delays", Information Technology Journal, vol.12, no.17, pp.4250-4255, 2013.
6. D. Dacic, D. Netic, "Observer design for wired linear networked control systems using matrix inequalities," Automatica, vol.44, pp. 2840-2848, 2008.
7. Y. Tian,Z. Yu, "Multifractal nature of network induced time delay in networked control systems," Physics Letter A, vol.361, pp. 103-107, 2007.
8. H. Yao, "Exponential Stabilization for a Class of Fuzzy Uncertain Networked Control Systems with Stochastic Time Delay," Advances in Information Sciences and Service Sciences, vol.4, no.9, pp.32-40, 2012.
9. X. Jiang, "A new H_{∞} stabilization criterion for networked control systems," IEEE Transactions on Automatic control, vol.53, pp. 1025-1031, 2008.

10. H. Yao, Z. Yuan, "Exponential Stability Control for T-S Fuzzy Nonlinear Stochastic Networked Control Systems", *International Journal of Advancements in Computing Technology*, vol. 4, no.3, pp.205-214, 2012.
11. H. Gao, "Stabilization of networked control systems with a new delay characterization," *IEEE Transactions on Automatic Control*, vol.53, pp. 2142-2148, 2008.
12. D. Huang, "Dynamic output feedback control for uncertain networked control systems with random network induced delays," *International Journal of control, Automation, and Systemes*, vol. 7, pp. 841-847, 2009.
13. Q. X. Zhu, S. S. Hu, "Controllability and observability of networked control systems," *Control and Decision*, vol.19, pp.157-161, 2004.
14. J. Nilsson, B. Bernhardsson, B.Wittenmark, "Stochastic analysis and control of real time systems with random time delays," *Automatica*, vol.34, pp.57-64, 1998.
15. G. M. Xie, L. Wang, "Stabilization of networked control systems with time-varying network-induced delay," *Proc. of the 43rd IEEE conference on Decision and Control*, pp.3551-3556, 2004.