






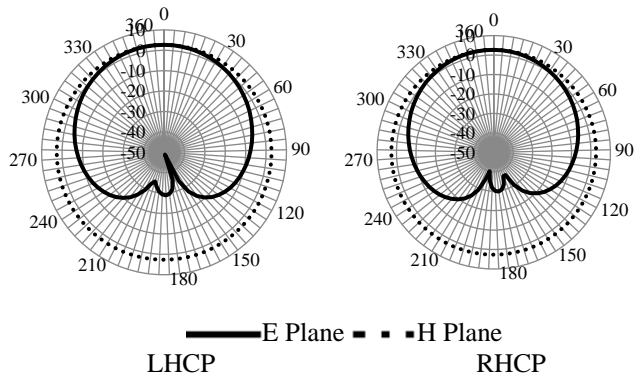

2.33GHz operating frequency.



**Figure 8.** Radiation pattern measured at the minimum axial ratio

Figure 8 shows E plane and H plane radiation characteristics for left-hand and right-hand circular polarization. It is seen that the antenna gives a good axial ratio over a wide beam angle of  $140^\circ$  ( $-70^\circ \leq AR \leq 70^\circ$ ) for both LHCP and RHCP configuration. The antenna gives a simulated gain of around 5.09 dBi for LHCP and 5.05 dBi for RHCP configuration.

**Table 2.** Performance comparison of the proposed model with traditional antenna model

Parameter	Proposed Model	Ref. [11]	Ref. [12]
Reflection Coefficient (dB)	-27.06 dB	-15 dB	-17 dB
Maximum Gain (dB)	5 dBi	6.3 dB	1.5 dB
3dB Axial Ratio beam width (dB)	$140^\circ$	$85^\circ \pm 2^\circ$	$100^\circ$

Table 2 gives the performance comparison of the proposed model with traditional antenna designs. It is observed that the antenna achieves a wider axial ratio beamwidth with better reflection coefficient characteristics when compared to other models. This ensures a wide field coverage in wireless communication systems.

## 5. CONCLUSIONS

A low profile circularly polarized reconfigurable antenna is presented. The antenna comprises a square shaped slot etched at its center. The nature of polarization is reconfigured by means of switches placed symmetrically in the slot regions. The antenna gives a measured -10 dB impedance bandwidth from 2.295 GHz to 2.365 GHz in the operating band. The antenna also achieves a good peak gain of 5.09dBi and 5.05 dBi for LHCP and RHCP at operating frequency. Radiation pattern results show the antenna has a good cross-polarization

isolation of -12 dB and -13 dB for RHCP and LHCP configurations with wider axial ratio beamwidth of  $140^\circ$  and hence finds suitable for modern wireless communications.

## REFERENCES

- [1] Krishna RVSR, Kumar R. (2016). A slotted UWB monopole antenna with single port and double ports for dual polarization. *Engineering Science and Technology, an International Journal* 19(1): 470–484.
- [2] Tong KF, Wong TP. (2007). Circularly polarized U-slot antenna. *IEEE Transactions on Antennas and Propagation* 55(8): 2382–2385.
- [3] Lee SW, Sung YJ. (2015). Reconfigurable rhombus-shaped patch antenna with Y-shaped feed for polarization diversity. *IEEE Antennas and Wireless Propagation Letters* 14: 163–166.
- [4] Bharathi A, Merugu L, Somasekhar Rao PVD. (2017). A novel single feed frequency and polarization reconfigurable microstrip patch antenna. *AEUE - International Journal of Electronics and Communications* 72: 8–16.
- [5] Wu F, Luk KM. (2017). A compact and reconfigurable circularly polarized complementary antenna. *IEEE Antennas and Wireless Propagation Letters* 16: 1188–1191.
- [6] Osman MN. (2015). An electronically reconfigurable patch antenna design for polarization diversity with fixed resonant frequency. *Radioengineering* 24(1): 45–53.
- [7] Luo Y, Chu QX, Zhu L. (2015). A miniaturized wide-beamwidth circularly polarized planar antenna via two pairs of folded dipoles in a square contour. *IEEE Transactions on Antennas and Propagation* 63(8): 3753–3759.
- [8] Ding K, Wang Y, Xiong X. (2012). A novel wide-beam circularly polarized antenna for SDARS applications. *IEEE Antennas and Wireless Propagation Letters* 11: 811–813.
- [9] Liu NW, Zhu L, Choi WW. (2016). Low-profile wide-beamwidth circularly-polarised patch antenna on a suspended substrate. *IET Microwaves, Antennas & Propagation* 10(8): 885–890.
- [10] Schuster Electronics. (2016). TL3780 Series surface mount tact switch datasheet.
- [11] Mak KM, Luk KM. (2009). A circularly polarized antenna with wide axial ratio beamwidth. *IEEE Transactions on Antennas and Propagation* 57(10): 3309–3312.
- [12] Massie G, Caillet M, Clénet M, Antar YMM. (2010). A new wideband circularly polarized hybrid dielectric resonator antenna. *IEEE Antennas and Wireless Propagation Letters* 9: 347–350.